

OIL-FREE PISTON SPECIFICATIONS





ANEST IWATA AIR ENGINEERING, Inc.
5325 Mulhauser Road
West Chester, OH 45011-9349
(513) 755-3100 FAX: (513) 755-0888

OILFREE PISTON BASE MOUNT AIR COMPRESSORS

Model OFB

OFB-

OFB-7.5/10/15



Model	Horse Power (HP)	Phase	Voltage (V)	PRESURE ON-OFF (PSI)	SCFM at 120 PSI (CFM)	Noise (dB)	TANK (GAL)	Filter 0.3 μ	Dryer Membrane With 0.01μ Filter	Auto Drain Sensor	Dimensions L x W x H (Reference)
OFB-3	3	3	208/230/460	90-120	9.5	-	-	-	-	-	43 x 25 x 25
OFB-5	5	3	208/230/460	90-120	15.0	-	-	-	-	-	44 x 25 x 26
OFB-7.5	7.5	3	208/230/460	90-120	24.0	-	-	-	-	-	47 x 25 x 26
OFB-10	10	3	208/230/461	90-120	30.0	-	-	-	-	-	47 x 25 x 26
OFB-15	15	3	208/230/460	90-120	42.0	-	-	-	-	-	47 x 25 x 26

OILFREE PISTON TANK MOUNT AIR COMPRESSORS

Model OFT






OFT-1/2

OFT-3/5

OFT-3/5-B

OFT-7.5/10/15

OFT-7.5/10/15-

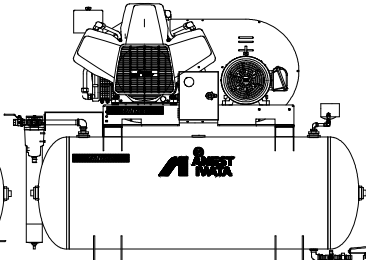






OFT-1/2-FM

OFT-3/5-

OFT-3/5-

OFT-7.5/10/15-B

OFT-20D

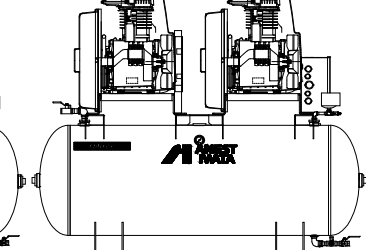

Model	Horse Power (HP)	Phase	Voltage (V)	PRESURE ON-OFF (PSI)	SCFM at 115 PSI (CFM)	Noise (dB)	TANK (GAL)	Filter 0.3 μ	Dryer Membrane With 0.01μ Filter	Auto Drain Sensor	Dimensions L x W x H (Reference)
OFT-1	1	3	208/230/460	90-120	3.2	59	30	-	-	-	26 x 18 x 58
OFT-1S	1	1	115/208/230	90-120	3.2	59	30	-	-	-	26 x 18 x 58
OFT-1-FM	1	3	208/230/460	90-120	2.7	59	30	AM250C-N03D	DM10-34CC-N	BEKOMAT-31	32 x 18 x 58
OFT-1S-FM	1	1	115/208/230	90-120	2.7	59	30	AM250C-N03D	DM10-34CC-N	BEKOMAT-31	32 x 18 x 58
OFT-2	2	3	208/230/460	90-120	5.7	69	30	-	-	-	26 x 18 x 58
OFT-2S	2	1	115/208/230	90-120	5.7	69	30	-	-	-	26 x 18 x 58
OFT-2-FM	2	3	208/230/460	90-120	4.9	69	30	AM250C-N03D	DM10-41CB-N	BEKOMAT-31	32 x 18 x 58
OFT-2S-FM	2	1	115/208/230	90-120	4.9	69	30	AM250C-N03D	DM10-41CB-N	BEKOMAT-31	32 x 18 x 58
OFT-3	3	3	208/230/460	90-120	9.5	72	30	-	-	-	50 x 26 x 52
OFT-3-FM	3	3	208/230/460	90-120	8.7	72	30	AM250C-N03D	DM10-47CB-N	BEKOMAT-31	52 x 26 x 52
OFT-5	5	3	208/230/460	90-120	15.0	73	60	-	-	-	50 x 26 x 53
OFT-5-FM	5	3	208/230/460	90-120	13.4	73	60	AM350C-N04D	DM20-53CC-N	BEKOMAT-31	52 x 26 x 53
OFT-5-B	5	3	208/230/460	90-120	15.0	73	80	-	-	-	65 x 26 x 52
OFT-5-FMB	5	3	208/230/460	90-120	13.4	73	80	AM350C-N04D	DM20-53CC-N	BEKOMAT-31	67 x 26 x 52
OFT-7.5	7.5	3	208/230/460	90-120	24.0	70	80	-	-	-	62 x 24 x 53
OFT-7.5-B	7.5	3	208/230/460	90-120	24.0	70	120	-	-	-	70 x 26 x 57
OFT-7.5-FMB	7.5	3	208/230/460	90-120	21.7	70	120	AM450C-N04D	DM20-60CC-N	BEKOMAT-31	75 x 26 x 57
OFT-10	10	3	208/230/460	90-120	30.0	75	80	-	-	-	62 x 24 x 53
OFT-10-B	10	3	208/230/460	90-120	30.0	75	120	-	-	-	70 x 26 x 57
OFT-10-FMB	10	3	208/230/460	90-120	26.5	75	120	AM450C-N04D	DM20-60CB-N	BEKOMAT-31	75 x 26 x 57
OFT-15	15	3	208/230/460	90-120	42.0	74	80	-	-	-	62 x 24 x 53
OFT-15-B	15	3	208/230/460	90-120	42.0	74	120	-	-	-	70 x 26 x 57
OFT-20D	20	3	208/230/460	85-115	60.0	78	120	-	-	-	70 x 47 x 57